

PARAPROJECT®

Case TC20 Plus

Protect , Charge , Transport



Part denomination	PARAPROJECT Case TC20 Plus TwinCharge, USB-C®, without cable, black
Part number	20872015101
GTIN /EAN	4006793003033
Field of application	Education
Certificates	CE / REACH / RoHS
Applicable standards	NRL 2011/65/EU / DIN EN 62368-1:2016-05. EMV 2014/35/EU / DIN EN 55022:210+AC:2011 / DIN EN 55035:2010. Rohs 2011/65/EU / DIN EN 5
Scope of delivery	<ul style="list-style-type: none"> - PARAPROJECT® Case TC20 Plus with integrated TwinCharge modules technology - device connection cable, EU, length: 5 m - 4 TwinCharge modules with USB-A and USB-C® ports - user guide
Materials	<ul style="list-style-type: none"> - X-ABS plastic - aluminium - Con-Pearl® - industrial leather
Transport	4-fold telescopic handle / 2 carrying handles / combination lock / 4 smooth-running castors ø 75 mm (with 2 lockable castors)
External dimensions (WxDxH)	720 mm x 390 mm x 550 mm
Weight	16500 g
Transport dimensions	760 mm x 420 mm x 570 mm
Dimensions of euro-pallets	1200 mm x 800 mm x 1065 mm
Number of euro-pallet	6
customs tariff number	85044083
Country of origin	RO

PARAPROJECT®

Case TC20 Plus

Protect , Charge , Transport


Fittings	<ul style="list-style-type: none"> - Interior technical equipment: - 20 storage compartments (W x D x H: 24 x 255 x 330 mm) for iPad/tablets - 4 TwinCharge modules, automatic adjustment via USB-PD Power Delivery and QuickCharge standards - 20 USB-A and USB-C® ports each - electro tower with main switch and Schuko socket for acces point - 2 active fans - temperature sensor - overvoltage protection - Case lid: - pocket with zipper, pocket with velcro fastener and mounting option for e.g. access point - air vents in the lid and bottom tray - External technical equipment: - central power supply with protective cap - RJ 45 network socket for e.g. access point - main switch - 4-fold telescopic handle - 2 carrying handles - combination lock - 4 smooth-running castors ø 75 mm (with 2 lockable castors)
Compatible devices	all tablets up to 11.5" that can be charged by USB-C® or USB-A (QuickCharge, PD)
Max. number of devices	20
Operating system	iOS / Android / Windows
Cable types for equipment	using customer's own USB-C® or USB-A data and charging cables
Power supply	4 TwinCharge modules for the complete power supply of devices
Output power per port	automatic adjustment via USB-PD Power Delivery and QuickCharge standards ; e.g. 20 iPad / Android tablet with 22 W each per port or 16 Surface Go 2 tablet with 24 W each per port ; USB-C® and USB-A output (22 / 30 / 45 W): DC ; 5 V / 9 V / 12 V / 15 V -> 3 A, 20 V -> 2.25 A
Optional accessories	<ul style="list-style-type: none"> - data and charging cable USB-C® to USB-C® - data and charging cable USB-C® to Lightning® - data and charging cable with LED display USB-A to Lightning® - data and charging cable USB-A to Lightning® - data and charging cable USB-A to USB-C®
Lock types	combination lock
Connections	<ul style="list-style-type: none"> - Outside: - central power supply with protective cap - RJ 45 network socket for e.g. access point - main switch - Inside: - main switch and Schuko socket for access point - 20 USB-A and USB-C® ports each, optional depending on the existing charging type
Data of currents	<ul style="list-style-type: none"> - 100 - 240 V - max. 10 A - 50 / 60 Hz
Dimension of pockets	22 x 225 x 310 mm (+ 50 mm zusätzliche Höhe dank Kofferdeckel)
Color	black

product image similar / information without content / subject to errors and changes / all dimensions in mm

PARAPROJECT®

Case TC20 Plus

Protect , Charge , Transport

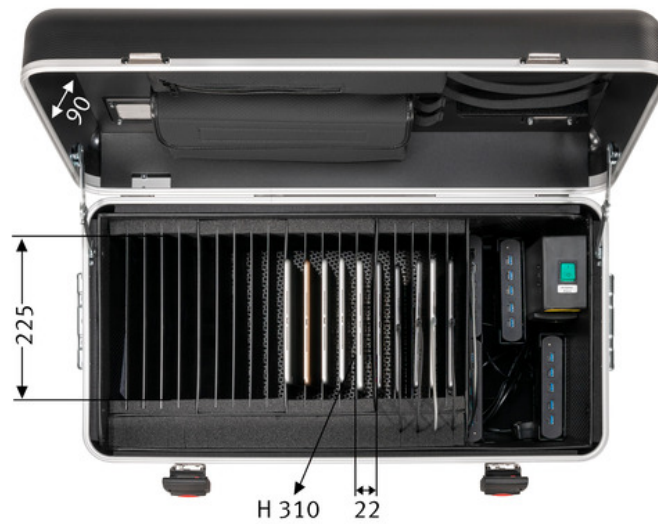

- main switch
- network port



- storage space for up to 20 tablets
- TwinCharge technology
- electric tower with integrated Schuko outlet for e.g. Access point