


PARAPROJECT®

Case i16, EDUCOVER®+/KidsCover

charging , synchronizing , transport , storage , flex2connect

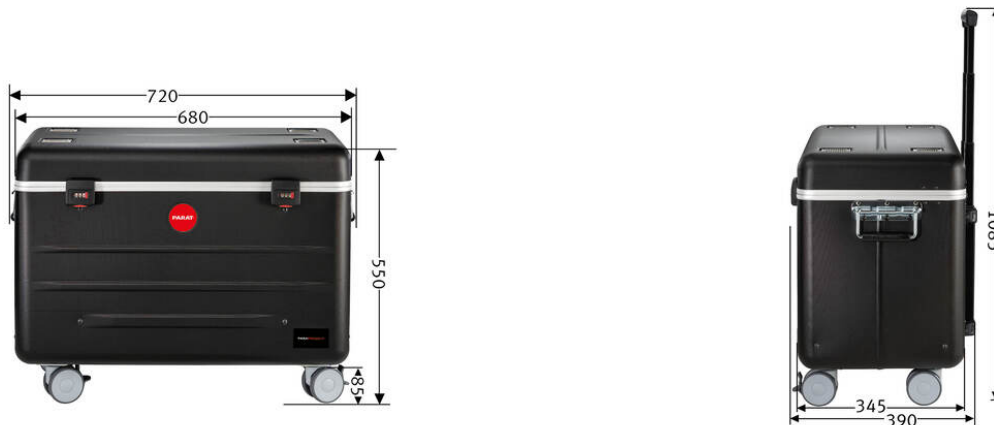

Part denomination	PARAPROJECT Case i16, EDUCOVER®+/KidsCover Charge&Sync, incl. USB-A to Lightning® / LED cable, black
Part number	208.640-15101
GTIN /EAN	4006793000773
Field of application	Education , Health Care
Certificates	CE / REACH / RoHS
Applicable standards	DIN EN 60950-1 / DIN EN 55022 / DIN EN 55035
Scope of delivery	<ul style="list-style-type: none"> - PARAPROJECT® Case i16, EDUCOVER®+/KidsCover - device connection cable, EU, length: 5 m - USB connection cable, length: 3 m - 16 data and charging cable with LED display USB-C® to Lightning® - y-adapter, C14 plug with 1 IBM sockets (C5, 3-pin) and 1 EURO-8-socket (C7, 2-pin, AUX 1) - y-adapter, C14 plug with 1 Euroflat socket (2-pin) and 1 EURO-8-socket (C7, 2-pin, AUX 2) - user guide
Materials	<ul style="list-style-type: none"> - aluminium - Con-Pearl® - X-ABS plastic - industrial leather
Transport	4-fold telescopic handle / 2 carrying handles / 4 smooth-running castors ø 75 mm (with 2 lockable castors)
External dimensions (WxDxH)	720 mm x 390 mm x 550 mm
Weight	15000 g
Transport dimensions	760 mm x 420 mm x 570 mm
Dimensions of euro-pallets	1200 mm x 800 mm x 1860 mm
Number of euro-pallet	6
customs tariff number	85044083
Country of origin	RO

PARAPROJECT®

Case i16, EDUCOVER®+/KidsCover

charging , synchronizing , transport , storage , flex2connect

Fittings	<ul style="list-style-type: none"> - Interior technical equipment: - 2 storage compartments (W x D x H: 280 x 235 x 360 mm) for up to 8 iPads each with KidsCover /EDUCOVER® - storage compartment (W x D x H: 130 x 240 x 320 mm) for master laptop - sync and charging unit - 16 data and charging cable with LED display USB-C® to Lightning® - internal timer to set charge time limit - emperature sensor - Case lid: - pocket with zipper, pocket with velcro fastener and push-in compartment with rubber loop - air vents in the lid and bottom tray - External technical equipment: - central power supply with protective cap - USB-B port for sync function - RJ 45 network socket for e.g. access point for e.g. access point - 4-fold telescopic handle - 2 carrying handles - combination lock - 4 smooth-running castors ø 75 mm (with 2 lockable castors)
Compatible devices	All iPad from generation 4, as well as mini , as well as all iPad Mini
Max. number of devices	16
Operating system	iOS
Cable types for equipment	data and charging cable with LED display USB-A to Lightning® ; y-adapter, C14 plug with 1 IBM sockets (C5, 3-pin) and 1 EURO-8-socket (C7, 2-pin, AUX 1) ; y-adapter, C14 plug with 1 Euroflat socket (2-pin) and 1 EURO-8-socket (C7, 2-pin, AUX 2)
Power supply	central power unit for the entire power supply of devices
Output power per port	max. 2,4 A
Optional accessories	<ul style="list-style-type: none"> - data and charging cable USB-C® to USB-C® - data and charging cable USB-C® to Lightning® - data and charging cable USB-A to Lightning® - data and charging cable USB-A to USB-C® - KidsCover - EDUCOVER®
Lock types	combination lock
Connections	<ul style="list-style-type: none"> - outside: - central power supply with protective cap - USB-B port for sync function - RJ 45 network socket for e.g. access point - optional: HDMI port inside: - 16 USB-A for Flex2Connect - Y-Adapter Kabel, C14-Stecker auf 1 x IBM-Buchse (C5, 3-polig) und 1 x Euro-8-Buchse (C7, 2-polig, AUX 1) - Y-Adapter Kabel, C14-Stecker auf 1 x Euroflach-Buchse (2-polig) und 1 x Euro-8-Buchse (C7, 2-polig, AUX 2)
Data of currents	<ul style="list-style-type: none"> - 100 - 240 V - max. 3,6 A - 50/60 Hz
Dimension of pockets	2 große Fächer, ohne Einteilung für je 8 iPads mit KidsCover/EDUCOVER®, 280 x 235 x 320 mm
Dimensions of other pockets	25 x 300 x 320 mm (+ 50 mm zusätzliche Höhe dank Kofferdeckel)
Color	black

product image similar / information without content / subject to errors and changes / all dimensions in mm

PARAPROJECT®

Case i16, EDUCOVER®+/KidsCover

charging , synchronizing , transport , storage , flex2connect



- network connector (RJ45) for access point
- optional HDMI port



- Space for 20 tablets with protective sleeves