


PARAPROJECT®

PARAPROJECT® Case i16

Charge , Sync , Transport , Storage , Protect

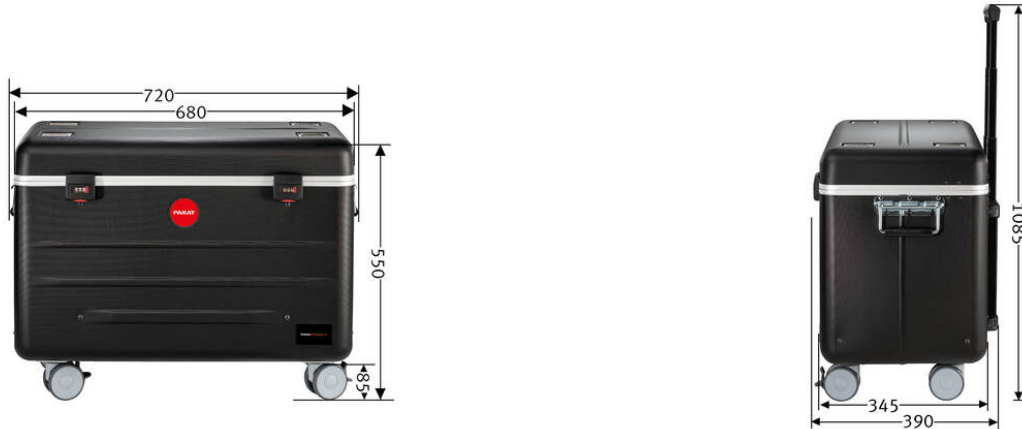

Part denomination	PARAPROJECT PARAPROJECT® Case i16 Charge&Sync, includes USB-A to USB-C® cable
Part number	20860315101
GTIN /EAN	4006793939912
Field of application	Education , Health Care
Certificates	CE / REACH / RoHS
Applicable standards	DIN EN 60950-1 / DIN EN 55022 / DIN EN 55035
Scope of delivery	- PARAPROJECT® Case i16 - device connection cable, EU, length: 5 m - USB connection cable, length: 3 m - 16 data and charging cable USB-A to USB-C® - y-adapter, C14 plug with 1 IBM sockets (C5, 3-pin) and 1 EURO-8-socket (C7, 2-pin, AUX 1) - y-adapter, C14 plug with 1 Euroflat socket (2-pin) and 1 EURO-8-socket (C7, 2-pin, AUX 2) - user guide
Materials	- aluminium - Con-Pearl® - X-ABS plastic - industrial leather
Transport	Teleskopauszug, 4-fach / 2 seitliche Tragegriffe / Zahlenschloss / 4 Leichtlaufräder ø 75 mm (davon 2 mit Radfeststeller)
External dimensions (WxDxH)	720 mm x 390 mm x 550 mm
Weight	17000 g
Transport dimensions	760 mm x 420 mm x 570 mm
Dimensions of euro-palettts	1200 mm x 800 mm x 1860 mm
Number of euro-pallet	6
customs tariff number	85044083
Country of origin	RO

PARAPROJECT®

PARAPROJECT® Case i16

Charge , Sync , Transport , Storage , Protect

Fittings	- Interior technical equipment: - 16 storage compartments (W x D x H: 28 x 220 x 310 mm) for iPad/tablets - storage compartment (W x D x H: 25 x 300 x 320 mm) for master laptop - storage compartment for accessories such as access point, router and/or Apple TV - sync and charging unit - 16 data and charging cable USB-A to USB-C® - internal timer to set charge time limit - temperature sensor - 2 sockets for e.g. master laptop or access point - Case lid: - pocket with zipper, pocket with velcro fastener and push-in compartment with rubber loop - air vents in the lid and bottom tray - External technical equipment: - central power supply with protective cap - USB-B port for sync function - RJ 45 network socket for e.g. access point - 4-fold telescopic handle - 2 carrying handles - combination lock - 4 smooth-running castors ø 75 mm (with 2 lockable castors)
Compatible devices	All tablets that can be charged by USB-C®
Max. number of devices	16
Operating system	Android / iOS / Windows
Cable types for equipment	data and charging cable USB-A to USB-C® ; y-adapter, C14 plug with 1 IBM sockets (C5, 3-pin) and 1 EURO-8-socket (C7, 2-pin, AUX 1) ; y-adapter, C14 plug with 1 Euroflat socket (2-pin) and 1 EURO-8-socket (C7, 2-pin, AUX 2)
Power supply	central power unit for the entire power supply of devices
Output power per port	2,4 A
Optional accessories	- data and charging cable with LED display USB-A to Lightning® - data and charging cable USB-A to Lightning®
Lock types	combination lock
Connections	- outside: - central power supply with protective cap - USB-B port for sync function - RJ 45 network socket for e.g. access point - optional: HDMI port - inside: - main switch - 16 USB-A for Flex2Connect - Y-Adapter Kabel, C14-Stecker auf 1 IBM-Buchse (C5, 3-polig) und 1 Euro-8-Buchse (C7, 2-polig, AUX 1) - Y-Adapter Kabel, C14-Stecker auf 1 Euroflat-Buchse (2-polig) und 1 Euro-8-Buchse (C7, 2-polig, AUX 2)
Data of currents	- 100 - 240 V - max. 3,6 A - 50/60 Hz
Dimension of pockets	28 x 220 x 260 mm (+ 50 mm zusätzliche Höhe dank Kofferdeckel)
Dimensions of other pockets	25 x 300 x 300 mm (+ 50 mm zusätzliche Höhe dank Kofferdeckel)
Color	black

product image similar / information without content / subject to errors and changes / all dimensions in mm

PARAPROJECT®

PARAPROJECT® Case i16

Charge , Sync , Transport , Storage , Protect



-- incl. charging timer



- central power supply with protective cap
- USB-B terminal for sync
- network connector (RJ45) for access point
- optional HDMI port