


PARAPROJECT®

Case i10, EDUCOVER®+/KidsCover

charging , synchronisation , transport , storage , Flex2Connect

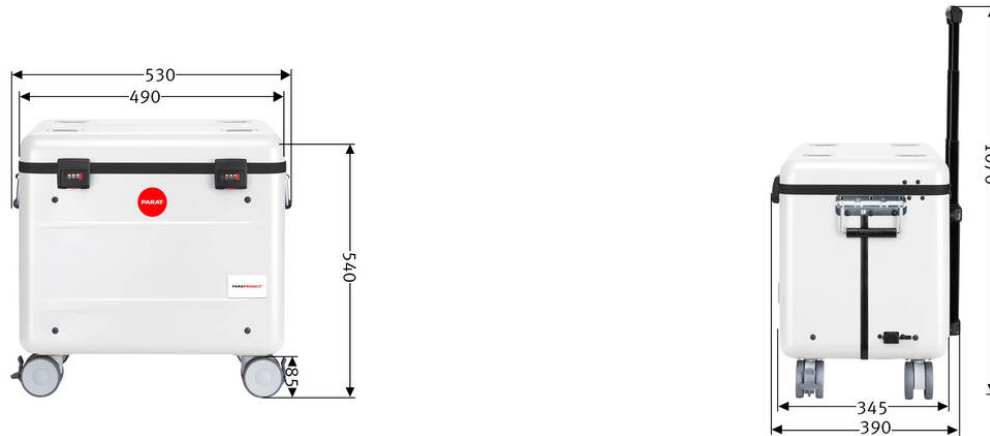

Part denomination	PARAPROJECT Case i10, EDUCOVER®+/KidsCover Charge&Sync, incl. USB Lightning® cable, white
Part number	208.617-170
GTIN /EAN	4006793002340
Field of application	Education , Health Care
Certificates	CE / REACH / RoHS
Applicable standards	DIN EN 60950-1 / DIN EN 55022 / DIN EN 55035
Scope of delivery	<ul style="list-style-type: none"> - PARAPROJECT® Case i10 EDUCOVER®+/KidsCover - device connection cable, EU, length: 5 m - USB connection cable, length: 3 m - 10 data and charging cable USB-A to Lightning® - y-adapter, C14 plug with 1 IBM sockets (C5, 3-pin) and 1 EURO-8-socket (C7, 2-pin, AUX 1) - y-adapter, C14 plug with 1 Euroflat socket (2-pin) and 1 EURO-8-socket (C7, 2-pin, AUX 2) - user guide
Materials	<ul style="list-style-type: none"> - aluminium - Con-Pearl® - ABS plastic / PMMA - industrial leather
Transport	4-fold telescopic handle / 2 carrying handles / 4 smooth-running castors ø 75 mm (with 2 lockable castors)
External dimensions (WxDxH)	530 mm x 390 mm x 495 mm
Weight	6900 g
Transport dimensions	540 mm x 400 mm x 530 mm
Dimensions of euro-pallets	1200 mm x 800 mm x 1740 mm
Number of euro-pallet	12
customs tariff number	85044083
Country of origin	RO

PARAPROJECT®

Case i10, EDUCOVER®+/KidsCover

charging , synchronisation , transport , storage , Flex2Connect

Fittings	<ul style="list-style-type: none"> - Interior technical equipment: - storage compartment (W x D x H: 310 x 210 x 360 mm) for up to 8 iPads with KidsCover /EDUCOVER® - storage compartment (W x D x H: 130 x 240 x 320 mm) for up to 2 iPads with KidsCover /EDUCOVER® - sync and charging unit - 10 data and charging cable USB-A to Lightning® - internal timer to set charge time limit - temperature sensor - Case lid: - pocket with zipper, pocket with velcro fastener and push-in compartment with rubber loop - air vents in the lid and bottom tray - External technical equipment: - central power supply with protective cap - USB-B port for sync function - RJ 45 network socket for e.g. access point - 4-fold telescopic handle - 2 carrying handles - combination lock - 4 smooth-running castors ø 75 mm (with 2 lockable castors)
Compatible devices	all iPad 4G and beyond as well as all iPad Mini
Max. number of devices	10
Operating system	iOS
Cable types for equipment	data and charging cable USB-A to Lightning® ; y-adapter, C14 plug with 1 IBM sockets (C5, 3-pin) and 1 EURO-8-socket (C7, 2-pin, AUX 1) ; y-adapter, C14 plug with 1 Euroflat socket (2-pin) and 1 EURO-8-socket (C7, 2-pin, AUX 2)
Power supply	central power unit for the entire power supply of devices
Output power per port	5V / up to 2,4A / up to 12w
Optional accessories	<ul style="list-style-type: none"> - data and charging cable USB-C® to USB-C® - data and charging cable USB-C® to Lightning - data and charging cable with LED display USB-A to Lightning® - data and charging cable USB-A to USB-C® - KidsCover - EDUCOVER®
Lock types	combination lock
Connections	<ul style="list-style-type: none"> - outside: - central power supply with protective cap - USB-B port for sync function - RJ 45 network socket for e.g. access point - optional: HDMI port - inside: - main switch - 10 USB-A for Flex2Connect - Y-Adapter Kabel, C14-Stecker auf 1 IBM-Buchse (C5, 3-polig) und 1 Euro-8-Buchse (C7, 2-polig, AUX 1) - Y-Adapter Kabel, C14-Stecker auf 1 Euroflach-Buchse (2-polig) und 1 Euro-8-Buchse (C7, 2-polig, AUX 2)
Data of currents	<ul style="list-style-type: none"> - 100 - 240 V - max. 3,6 A - 50 / 60 Hz
Dimension of pockets	linkes Fach (BxTxH): 310 x 210 x 320 mm; rechtes Fach (BxTxH): 130 x 240 x 320 mm (+ jeweils 50 mm zusätzliche Höhe dank Kofferdeckel)
Color	white

PARAPROJECT®

Case i10, EDUCOVER®+/KidsCover

charging , synchronisation , transport , storage , Flex2Connect

product image similar / information without content / subject to errors and changes / all dimensions in mm



- 10x USB data and charging cable to lightning connector with LED display



- central power supply with protective cap