

PARAPROJECT®

Cube C12

Protect , Charge , Transport



Part denomination	PARAPROJECT Cube C12 USB-C® without cable
Part number	990700999
GTIN /EAN	4006793003316
Field of application	Education
Certificates	GS / REACH / RoHS
Applicable standards	CE/EMC: EN62368.1 / IEC62368.1
Scope of delivery	- PARAPROJECT® Cube C12 - device connection cable, EU, length: 2 m - 2 keys - user guide
Materials	- powder-coated steel sheet - ABS plastic
External dimensions (WxDxH)	500 mm x 452 mm x 390 mm
Weight	18000 g
Transport dimensions	600 mm x 490 mm x 530 mm
Dimensions of euro-pallets	1200 mm x 800 mm x 1860 mm
Number of euro-pallet	6
customs tariff number	94032080
Country of origin	CN
Fittings	- Interior technical equipment: - 12 storage compartments (W x D x H: 32 x 350 x 290 mm) for iPad/tablets - 12 USB-C® ports - LED charging status indicator - temperature sensor - active fans - External technical equipment: - central power supply with protective cap - main switch - handle recesses on both sides - lockable plastic roller shutter - barrel lock - floor gliders
Compatible devices	all tablets / chromebooks / ultrabooks that can be charged by USB-C®
Max. number of devices	12
Operating system	iOS / Android / Windows
Cable types for equipment	using customer's own USB-C® or USB-A data and charging cables
Power supply	central power supply


PARAPROJECT®

Cube C12

Protect , Charge , Transport

Output power per port	automatic adjustment via USB-PD Power Delivery and QuickCharge standards ; e.g. 12 iPad / Android tablet with 45 W per port ; USB-C® output ; 5 V / 9 V / 10V / 12 V /15 V -> 3 A; 20 V -> 2,25 A
Optional accessories	- data and charging cable USB-C® to USB-C® - data and charging cable USB-C® to Lightning® - wall holder 990624999
Lock types	barrel lock
Connections	- outside: - central power supply with protective cap - main switch - inside: - 12 USB-C® ports each
Data of currents	- 100 - 240 V - max. 8 A
Dimension of pockets	32 mm x 350 mm x 290 mm
Color	black ; white

product image similar / information without content / subject to errors and changes / all dimensions in mm

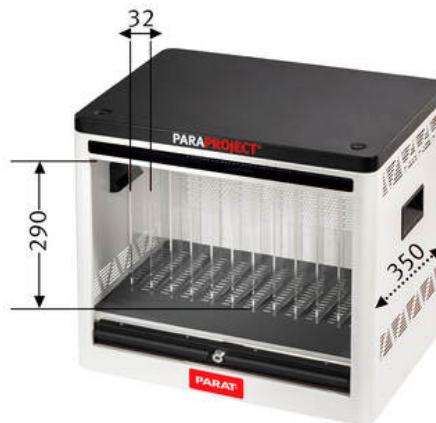

- incl. LED status charging indicator
- incl. 12 x USB-C ports



- central on/off switch
- active ventilation
- central device connection and overvoltage protection