

PARAPROJECT®

Case TC20

Protect , Charge , Transport



Part denomination	PARAPROJECT Case TC20 TwinCharge, without cable
Part number	208720151
GTIN /EAN	4006793002883
Field of application	Education
Certificates	CE / REACH / RoHS
Applicable standards	DIN EN 60950-1 / DIN EN 55022 / DIN EN 55035
Scope of delivery	<ul style="list-style-type: none"> - PARAPROJECT® Case TC20 with integrated TwinCharge modules technology - device connection cable, EU, length: 5 m - 4 TwinCharge modules with USB-A and USB-C® ports - user guide
Materials	<ul style="list-style-type: none"> - X-ABS plastic - aluminium - Con-Pearl® - industrial leather
Transport	Teleskopauszug, 4-fach / 2 seitliche Tragegriffe / Zahlenschloss / 4 Leichtlaufräder ø 75 mm (davon 2 mit Radfeststeller)
External dimensions (WxDxH)	720 mm x 390 mm x 550 mm
Weight	14500 g
Transport dimensions	760 mm x 420 mm x 570 mm
Dimensions of euro-pallets	1200 mm x 800 mm x 1860 mm
Number of euro-pallet	6
customs tariff number	85044083
Country of origin	RO

PARAPROJECT®

Case TC20

Protect , Charge , Transport


Fittings	<ul style="list-style-type: none"> - Interior technical equipment: - 20 storage compartments (W x D x H: 24 x 255 x 330 mm) for iPad/tablets - 4 TwinCharge modules, automatic adjustment via USB-PD Power Delivery and QuickCharge standards - 20 USB-A and USB-C® ports each - temperature sensor - overvoltage protection - Case lid: - pocket with zipper, pocket with velcro fastener and mounting option for e.g. access point - air vents in the lid and bottom tray - External technical equipment: - central power supply with protective cap - main switch - 4-fold telescopic handle - 2 carrying handles - combination lock - 4 smooth-running castors ø 75 mm (with 2 lockable castors)
Compatible devices	all tablets up to 12.9" that can be charged by USB-C® or USB-A
Max. number of devices	20
Operating system	iOS / Android / Windows
Cable types for equipment	using customer's own USB-C® or USB-A data and charging cables
Power supply	4 TwinCharge modules for the complete power supply of devices
Output power per port	automatic adjustment via USB-PD Power Delivery and QuickCharge standards ; e.g. 20 iPad / Android tablet with 22 W each per port or 16 Surface Go 2 tablet with 24 W each per port ; USB-C® and USB-A output (22 / 30 / 45 W): DC ; 5 V / 9 V / 12 V / 15 V -> 3 A, 20 V -> 2.25 A
Optional accessories	<ul style="list-style-type: none"> - data and charging cable USB-C® to USB-C® - data and charging cable USB-C® to Lightning® - data and charging cable with LED display USB-A to Lightning® - data and charging cable USB-A to Lightning® - data and charging cable USB-A to USB-C®
Lock types	combination lock
Connections	<ul style="list-style-type: none"> - Outside: - central power supply with protective cap - main switch - Inside: - 20 USB-A and USB-C® ports each, optional depending on the existing charging type
Data of currents	<ul style="list-style-type: none"> - 100 - 240 V - max. 10 A - 50/60 Hz
Dimension of pockets	24 x 255 x 310 mm (+ 50 mm zusätzliche Höhe dank Kofferdeckel)
Color	black

product image similar / information without content / subject to errors and changes / all dimensions in mm

PARAPROJECT®

Case TC20

Protect , Charge , Transport

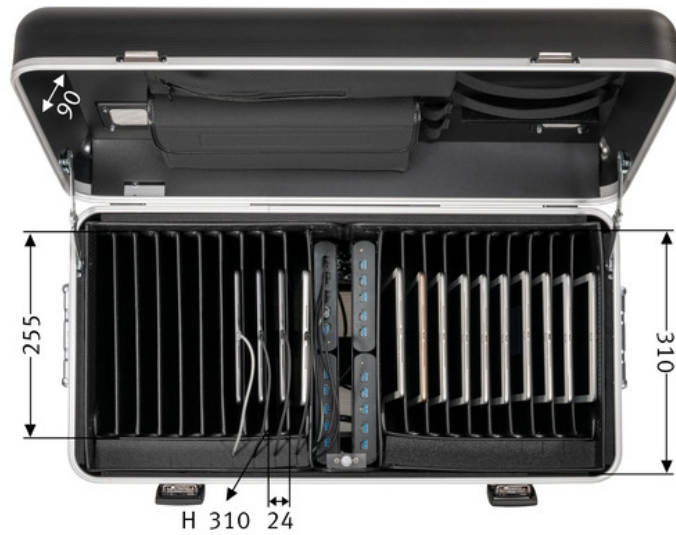

- main switch
- overvoltage protection



- storage space for up to 20 tablets
- TwinCharge technology