

PARAPROJECT®

Trolley i32 PRO

Charge , Synchronisation , Transport , Storage , Flex2Connect



Part denomination	PARAPROJECT Trolley i32 PRO Charge&Sync, incl. Lightning® cable
Part number	832.510-999
GTIN /EAN	4006793825994
Field of application	Education , Health Care
Certificates	CB / CE / GS / REACH / RoHS
Applicable standards	DIN EN 55022 / DIN EN 55035 / DIN EN 61000-3-2 / DIN EN 61000-3-3 / DIN EN 60950-1
Scope of delivery	<ul style="list-style-type: none"> - PARAPROJECT® Trolley i32 PRO - device connection cable, EU, length: 3 m - data cable USB-A to USB-B, length: 1 m - 32 data and charging cable USB-A to Lightning® - user guide
Materials	<ul style="list-style-type: none"> - ABS plastic - powder-coated steel sheet
Transport	4 smooth-running castors ø 120 mm (with 2 lockable castors) / 2 handles
External dimensions (WxDxH)	820 mm x 535 mm x 930 mm
Weight	72000 g
Transport dimensions	835 mm x 585 mm x 1100 mm
Dimensions of euro-pallets	835 mm x 585 mm x 1100 mm
Number of euro-pallet	1
customs tariff number	94037000
Country of origin	TW

PARAPROJECT®

Trolley i32 PRO

Charge , Synchronisation , Transport , Storage , Flex2Connect


Fittings	<ul style="list-style-type: none"> - Interior technical equipment: - 32 storage compartments (W x D x H: 25 x 345 x 300 mm) for iPads / tablets - 32 USB-A ports - 32 data and charging cable USB-A to Lightning® - LED status charging indicator - Central power supply units (2 units in the technical compartment) with temperature sensor (overheating protection) and active fan - drawer for master laptop and accessories (W x D x H: 525 x 290 x 40 mm) - External technical equipment: - central power supply - main switch - 2 USB-B ports for sync function - RJ 45 network socket for e.g. access point - 3 Schuko sockets - media well - lockable compartment - 2 handles - retractable swing - lockable with padlock (not included in the scope of delivery) - 4 smooth-running castors ø 120 mm (with 2 lockable castors)
Compatible devices	all iPad from generation 4 , and all iPad Mini
Max. number of devices	32
Operating system	iOS
Cable types for equipment	data and charging cable USB-A to Lightning®
Power supply	central power supply for all devices
Output power per port	2,4 A
Optional accessories	<ul style="list-style-type: none"> - data and charging cable USB-A to USB-C® - data and charging cable with LED display USB-A to Lightning® - KidsCover - EDUCOVER®
Lock types	can be locked by a padlock
Connections	<ul style="list-style-type: none"> - Outside: - central power supply with protective cap - RJ 45 network socket for e.g. access point - USB-B port for sync function - 3 Schuko sockets - main switch - Inside: - 32 USB-A ports for Flex2Connect - patch cable with RJ 45 plug
Data of currents	<ul style="list-style-type: none"> - 100 - 240 V - max. 12 A - 50/60 Hz
Dimension of pockets	25 x 345 x 300 mm
Dimensions of other pockets	505 x 290 x 40 mm
Color	white

product image similar / information without content / subject to errors and changes / all dimensions in mm

PARAPROJECT®

Trolley i32 PRO

Charge , Synchronisation , Transport , Storage , Flex2Connect

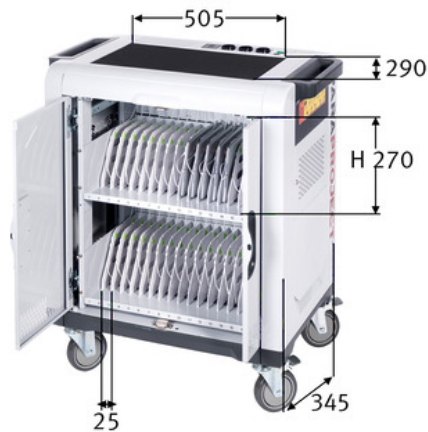

- master switch (on/off-switch)
- 2x USB 2.0 type B socket
- 3x SCHUKO socket outlet with on/off-switch



- 2x 16 USB 2.0 type A
- 1x patch cable with RJ 45 plug